



10/52/745
1071662004/004721



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 28 DEC 2004

WIPO

PCT

PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., l.c. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

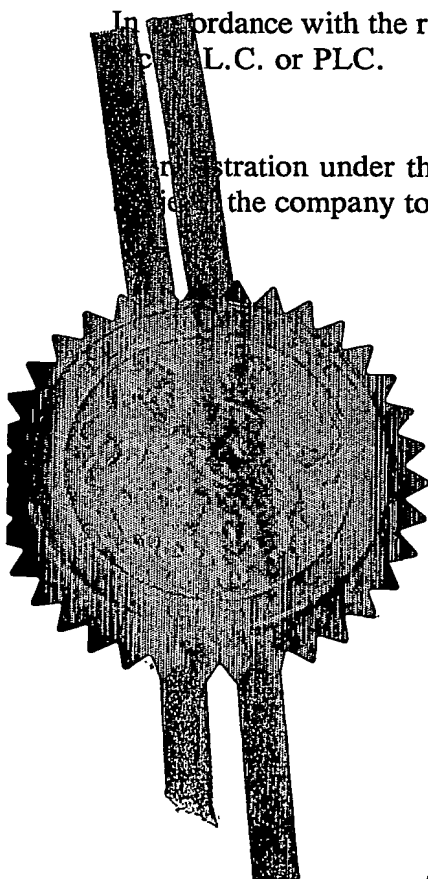

Signed

Dated 2 December 2004

BEST AVAILABLE COPY



GB0327041.0

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

BAE SYSTEMS PLC,
Incorporated in the United Kingdom,
6 Carlton Gardens,
LONDON,
SW1Y 5AD,
United Kingdom

[ADP No. 07914674004]

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
CF
21 NOV 2003
RECEIVED BY FAX

The
Patent
Office

21NOV03 E853816-1 D003
P01/7700 0.00-0327041.0

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

2003P17754 GB / R76 / MOM / JBO

2. Patent application number
(The Patent Office will fill in this part)

0327041.0

21 NOV 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Roke Manor Research Limited
Roke Manor,
Old Salisbury Lane
Romsey,
Hampshire SO51 0ZN

APPLICATION FILED 3/9/04
SECTION 30 (1977 ACT)

Patents ADP number (if you know it)

05615455007 ✓

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

5. Name of your agent (if you have one)

BAE Systems plc, Group IP Dept.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Lancaster House
PO Box 87
Farnborough Aerospace Centre
Farnborough
Hampshire
GU14 6YU
07914674002

Siemens Shared Services
Intellectual Property Department
Siemens House
Oldbury, Bracknell, Berkshire RG12 8FZ

Patents ADP number (if you know it)

85,827,690.01

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f).

Patents Form 1/77

Patents Act 1977
(Rule 16)**The
Patent
Office**

1/77

8. Is a Patents Form 7/77 (Statement of Inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
Otherwise, answer NO (see note d).

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form.

Continuation sheets of this form

Description	11
Claim(s)	0
Abstract	0
Drawing(s)	0

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

We request the grant of a patent on the basis of this application

Signature

Date

Marc Morgan

20.11.2003

Intellectual Property Department

12. Name and daytime telephone number of Person to contact in the United Kingdom

Marc Morgan

+ 44 1980 86 3813

Apparatus and Methods

5

The inventions relate in, the specific embodiment, to apparatus and methods for use in an object location and or tracking system. The described system is one proposed under the trademark CELLDAR™ but the inventions have a wider applicability including electronic apparatus in general.

10

CELLDAR utilises radio-waves emanating from base-stations in a cellular communication system to locate objects. A first invention comprises a novel technique, whereby the reference signal required by the CELLDAR™ radar receiver may be recovered & regenerated with high accuracy. CELLDAR™

15

obtains target information by correlating the reference signal from the transmitter with reflected signals in both the time and frequency domains.

An approximation to the reference signal may easily be obtained by use of a high gain antenna directed towards the base station feeding a second receiver channel, which is phase locked to the target detection receiver. However, the

20

reference so obtained is generally corrupted by multipath and interference from other distant base stations re-using the same frequency. These effects limit the dynamic range of breakthrough cancellation.

In the first invention, the phase & frequency of the reference signal with

25

respect to the receiver local oscillator are recovered and the channel impulse response is estimated. This information is used to correct the received signal for phase & frequency offsets and multipath delays and then to demodulate

the symbol stream in the signal. The demodulated symbols are hard limited, which has the effect of removing any interference, provided that the wanted signal is significantly larger than the interference, which is the case of interest. The appropriate modulation is then applied to the recovered
5 symbols and the previously measured phase & frequency offsets are incorporated, to create a regenerated reference signal uncorrupted by multipath or interference.

The following description of the technique is given in terms of its current
10 implementation, using GSM signals, but the technique can be applied to any digital cellular radio system whose signal structure contains defined synchronisation bursts, training sequences, preambles etc., without loss of generality. Thus the invention is not limited to the CELLDAR system.

15 In GSM systems, initial frame and burst timing is obtained by a correlation search for the main synchronisation bursts, and the timing, phase & frequency offset information is then obtained by correlating the centre section of selected GSM bursts with stored versions of the allowed modulation patterns for those bursts. Conventional GSM receivers decode
20 information from the signal to establish which bursts contain data relevant to them, and which of the set of 8 training sequences is being used to characterise those bursts. Bursts containing no data are filled with a "dummy" code and are not processed. However, the CELLDAR™ receiver must demodulate the entire signal, so that it performs a maximum likelihood
25 correlation for all the training sequences, treating the dummy burst as an extra training sequence. Since each correlation is performed over a span of

symbols (16 or more) significant processing gain is achieved against any interference.

The magnitudes and positions of the complex correlation peaks are also used
5 to maintain signal timing and to identify which GSM burst timing option is
in use (e.g. many transmitters use a burst length cycle of 156, 156, 156, 157
etc. symbols instead of the nominal 156.25 symbol burst length defined in
the ETSI specifications). Such timing differences are irrelevant to normal
GSM receivers, but CELLDAR™ must identify the option in use, as it must
10 recover the entire signal. The ratios of the real & imaginary correlation
results are used to determine the phase & frequency offset data.

Control bursts, whose positions are known from the signal structure, such as
frequency correction bursts & synchronisation bursts, are processed
15 appropriately to recover the required data.

A further feature of the invention, is that the close-in phase noise of the
down-converted reference is automatically recovered and re-applied to the
regenerated signal. The regenerated reference must contain this phase noise,
20 in order to cancel the identical phase noise present on breakthrough & clutter
in the target detection process. The GSM burst rate is approximately 1.73
kHz, which represents the Nyquist rate for phase noise sampling, and
implies phase noise cancellation below target Doppler frequencies of 866
Hz. The Doppler frequencies of most targets of interest are significantly
25 lower than this.

In situations where the breakthrough from the transmitter into the target detection channel of the receiver is sufficiently large, the technique may be applied to this breakthrough signal itself, thus obviating the need for a separate reference receiver & antenna.

5

A second invention comprises a novel technique for the calibration of phased array antenna systems used by the CELLDAR™ radar receiver, and exploits the properties of the cellular radio signals which CELLDAR™ uses operationally. The description is given in terms of GSM modulation, but the
10 technique can be applied to any digital cellular radio system without loss of generality.

In order to optimise performance and increase flexibility, CELLDAR™ is being designed to use a phased array antenna system for synthetic beam/null
15 generation and steering. Such arrays comprise a number of antennas, with parallel receiver channels, cabling, A/D converters and digital IF systems. The outputs of these parallel channels are suitably combined in amplitude & phase to create the desired antenna beam patterns. This process can only be performed successfully if the transfer characteristics of each of the channels
20 are known.

These characteristics are generally determined by injecting a known signal into each of the receiver channels and measuring the IF outputs. Normally a simple sinusoid is used, but with this invention a special GSM-like signal is
25 employed. This signal is generated by selecting a pseudo-random binary sequence which has good auto-correlation properties. GMSK modulation is

applied and the result is up-converted to the calibration channel frequency. Appropriate signals may be easily generated by test equipment.

Calibration is achieved by performing a complex correlation of the signal
5 from each receiver channel with the original GMSK-modulated pseudo-
random sequence. The correlation result has the following important
properties.

1. Since the correlation can be performed over a wide symbol
10 span, there is obtained considerable processing gain against noise,
thus enhancing the accuracy of the calibration.
2. The calibration signal has the same spectral & modulation
characteristics as a normal GSM signal, so that the effects of filter
15 characteristics, amplifier group delays etc. will be accurately
reproduced in the calibration.
3. The amplitude and phase characteristics of each channel are
simply obtained from the real & imaginary results of the complex
20 correlations.
4. The position of the correlation peak permits the delay through
each channel to be measured. This may be important when digital
receiver techniques are employed, since the latency through DSP
25 chips may be significant and may in addition be different at each
power up. This can occur, for example, if the DSP or interface clocks
are derived from dividing down a high frequency master clock by 4,

so that each logic block in the system then has the choice of selecting at random from one of 4 clock phases at power up.

Although the invention is described in terms of an optimised GSM-like
5 signal generated by the CELLDAR™ equipment, the scope does not exclude the use of a signal received directly by the antennas from a local base station. In this case, the calibration would either be performed by cross-correlation between the channels or with a reference obtained from a second receiver and antenna, optimised to receive the base station signal.

10

The CELLDAR™ radar receiver obtains target information (range and velocity) by comparing the reference signal direct from the transmitter with reflected signals, utilising both the time and frequency domains. In addition to returns from genuine targets, large interfering signals are generally also
15 present, and these create noise and spuri in the comparison process in a number of complex ways, which have the result of desensitising the detection performance of the system.

Interference can be caused by breakthrough of the reference signal via the
20 target antenna sidelobes and through reflections from ground clutter.

The method of reducing the effect of this type of interference described here depends on the fact that the CELLDAR™ system can categorise all received signals in terms of delay, Doppler frequency and phase relative to the
25 reference signal, and also that the principal sources of interference have much smaller delays and Doppler frequencies than the target classes of interest.

A third invention provides a back off method in which the received signal is first of all processed by correlation against the reference to extract the signal returns present in the set of range-Doppler cells identified as covering the
5 significant interferers. These returns are then used to estimate the amplitudes and phases of such interferers relative to the reference signal.

Finally, equal and opposite polarity signals to these interferers are generated using the stored reference signal and these signals are added to the raw
10 received signal in order to cancel out the interferers.

As this system does not employ feedback, in principle no residual interference "error" term is involved, so the cancellation depth is limited only by the precision to which the parameters of the interfering signals can
15 be measured and then reconstructed.

Increased performance can be obtained if the process is applied iteratively.

The proposed CELLDAR™ system applies this technique to GSM signals,
20 but it can be adapted to any digital cellular radio system without loss of generality.

In the broadest sense, the forth invention measures interference during the period of time allocated to a predetermined signalling signal. A forth
25 invention applicable to a cellular communications system and in particular a GSM communications system permits the measurement of the level of interference due to frequency re-use in adjacent cells. Normally it is difficult

to measure such interference, since although it may be significant in system terms, it may be 30 dB or more below the level of the wanted signal. Limited measurement may be possible during the guard periods of the wanted transmission, but these periods are of such short duration that power assessment is difficult, they may be compromised by the response time of the receiver, and also because the wanted transmitter may not reduce its power significantly during the guard periods.

A novel method is proposed, which exploits the pre-defined modulation characteristics of certain elements of the GSM signal. For illustrative purposes, the use of the Frequency Correction Burst (FCB) is described here, but this does not exclude the use of other elements of the signal, or extension of the method to other digital cellular radio systems.

FCBs occur on a regular basis in the BCCH channel and each is of significant length (142 symbols) with a specified modulation pattern, thus giving known periods of a received signal with defined properties from the wanted transmitter, during which signal power measurement can be performed. The receiver synchronises to the BCCH signal in the normal way, using the synchronisation bursts, and then locates the positions of the FCBs. Each received FCB is filtered with an FIR whose weights are the complex conjugate of the FCB signal modulation applied at the transmitter. The output from the filter is then analysed statistically. If no interference is present, the output will have a constant value, which is proportional to the power of the wanted received signal. If interference is present, the output will have in addition a noise-like component superimposed, generated by the

convolution of the FCB filter weights with the essentially independent pseudo-random modulation of the interfering signal.

By measurement of the mean & variance of the filter output over a received
5 signal span which includes several FCBs and applying a suitable averaging,
the signal to interference ratio can then be estimated to a high degree of
accuracy over a wide dynamic range.

The results can be used simply to measure the interference levels for survey
10 purposes, or can provide a control signal for advanced system functions such
a steering of an antenna null towards the interfering transmission.

A fifth invention can reduce substantially the level of spurious in the spectrum
of an unknown signal which is corrupted by bursts of regular or quasi-
15 regular interference, the timing characteristics of which are known. Whilst
described in terms of the CELLDAR system it is not limited to such a
system.

It can be shown mathematically that the effect of interference bursts cannot
20 be removed entirely unless each burst can be substituted by an accurate
estimate of the original signal waveform over each burst period. It may be
possible to perform such a substitution to an acceptable degree of precision
when the signal is strong and not corrupted by noise, but in the case where
the wanted signal is weak and not visible above the level of noise and other
25 unwanted signals, substitution cannot be successfully performed. It should
also be noted that simple excision of the interference bursts is ineffective,
since it merely replaces one interfering signal with another.

This process attenuates the effect of the interference bursts by typically applying a sinusoidal amplitude window to the signal, such that the zero crossing points of the sinusoid coincide with the centres of the interference bursts. For regular interference, the sinusoid has a frequency which is half that of the interference repetition rate. For quasi-regular interference, each half-period of the windowing function is adjusted to maintain the zero crossings at the burst interference midpoints.

Although the process is described here in terms of a sinusoidal windowing function with zero crossings at the interference midpoints, it does not exclude the use of other windowing functions which may be selected to achieve optimum results, taking the characteristics of the interference into account.

One result of the windowing is to selectively reduce the power of the interference relative to the wanted signal. Another result of the windowing is to apply a modulation to the wanted signal. In the spectral domain, this is observed as a splitting of each signal peak into two peaks, separated by twice the windowing frequency and centred on the true frequency. For many applications, this may be acceptable, but a good estimate of the true signal spectrum may be obtained by a simple algorithm which combines peak pairs, given the knowledge that the frequency separation is defined and the amplitudes of each peak are identical.

In the present context, this process is applied to reduce the effect of frequency correction bursts in GSM transmissions used by the CELLDAR™


11

passive radar system but it could be utilised in other systems where the effect of particular signalling bursts need to be alleviated.


5

Lyn White

PCT/GB004/004921

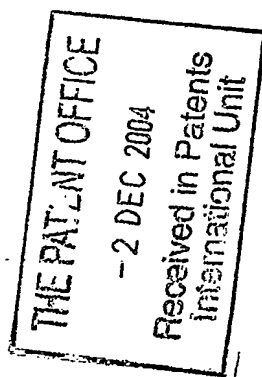

PCT/GB2004/004921

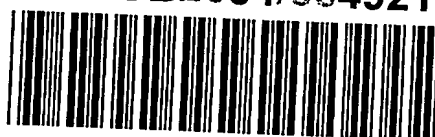

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.